



THERMAL BY  **FLIR**[®]



WORKSWELL GIS - 320

DRONE INSPECTION GAS IMAGING CAMERA

 **grafinta**
Avda. Filipinas, 46
28003 Madrid
Tfo. 91 5537207
Fax 91 5336282
E-mail grafinta@grafinta.com

Release date: 27th of April 2021


Revision Number: 210427

Workswell GIS-320 technical specification

Infrared Cooled Camera (MWIR) with operating system (GIS OS) onboard	
Resolution	320 x 240 pixels
Temperature ranges	Temperature range between -20 °C...+350 °C (-4 °F 662 °F)
Temperature sensitivity	0.010 °C (10 mK)
Frequency	30 Hz
Spectral range	3.2 – 3.4 μm, Cooled InSb FPA detector (MWIR)
Lens	24° x 18° or 14,5° x 10,8°
Focus	Automatic Motorized focusing, minimum focus distance 0.5 m
Zoom	Digital zoom 1 – 4x in infrared image
HSM – High Sensitivity mode	Yes
Temperature level adjustments	Yes, automatic, manual or moving span
Digital Visual Camera	
Resolution	1 920 x 1 080 pixels (Full HD), 1/3” sensor, Auto white balance, Wide dynamic range, Blacklight compensation, Exposure and Gamma control
Focus	Autofocus with Direct Focus Zoom synchronization
Optical Zoom	10x optical zoom with vibration compensation
View angle	Ultra zoom 6.9° - extra wide 58.2°, focal 33.0 mm – 3.3 mm
Remote control & Video output	
10-pin digital port	S.BUS CAN bus (compatible with DJI M600 and A3 controllers) MavLink CANbus & Command Control Protocol – serial camera control External GPS connectivity & External trigger
Ethernet port (RJ-45)	Video streaming and camera control via API (on request)
USB 2.0 port	Keyboard connection for in-house or stationary camera control
Video output	Digital HDMI 720p (1280 x 720px), Aspect ratio 16:9, Micro HDMI
Memory and data recording	
Image and video formats	Radiometric JPEG images and Digital camera JPEG Full HD Radiometric TIFF (Pix4D and Agisoft compatible for 3D modeling) Digital camera h.264 encode video HD recording Radiometric full-frame IR recording (raw data recording in 30 Hz)
GPS tagging	MavLink External GPS A3 DJI compatible via CAN bus interface
Memory	Internal high-speed SSD 256GB for image and video recording External slot for Micro SD card & USB 2.0 for USB stick for taking images



Camera functions	
Multi camera modes	Full screen mode, IR only, VIS only, Picture in Picture with optical zoom
Measurement functions	Max temperature, Min temperature, Centre temperature
Temperature range settings	Automatic, manual or span mode (NUC control adjustable)
Following gases are detected	
Gases (200+ gases detectable)	Benzene, Ethanol, Ethyl-benzene, Heptane, Hexane, Isoprene, Methanol, MEK, MIBK, Octane, Pentane, 1-Pentene, Toluene, m-xylene, Butane, Methane, Propane, Ethylene and Propylene.
Software and SDK	
Desktop software	Advanced thermal analysis and reporting SW including in the package
Environmental data, Power supply & dimensions	
Input supply voltage	10 – 28 VDC, Coaxial 2 x 6.4mm, outer shell - GND
Power dissipation (avg.)	18 W
Operating temperature	-15°C to +50°C (5 °F to 122 °F)
Mounting	4 x 1/4-20 UNC thread
Dimensions and weight	201 x 150 x 101 mm, <1.6 kg (7.9 x 5.9 x 3.97 in), <3.5 lb

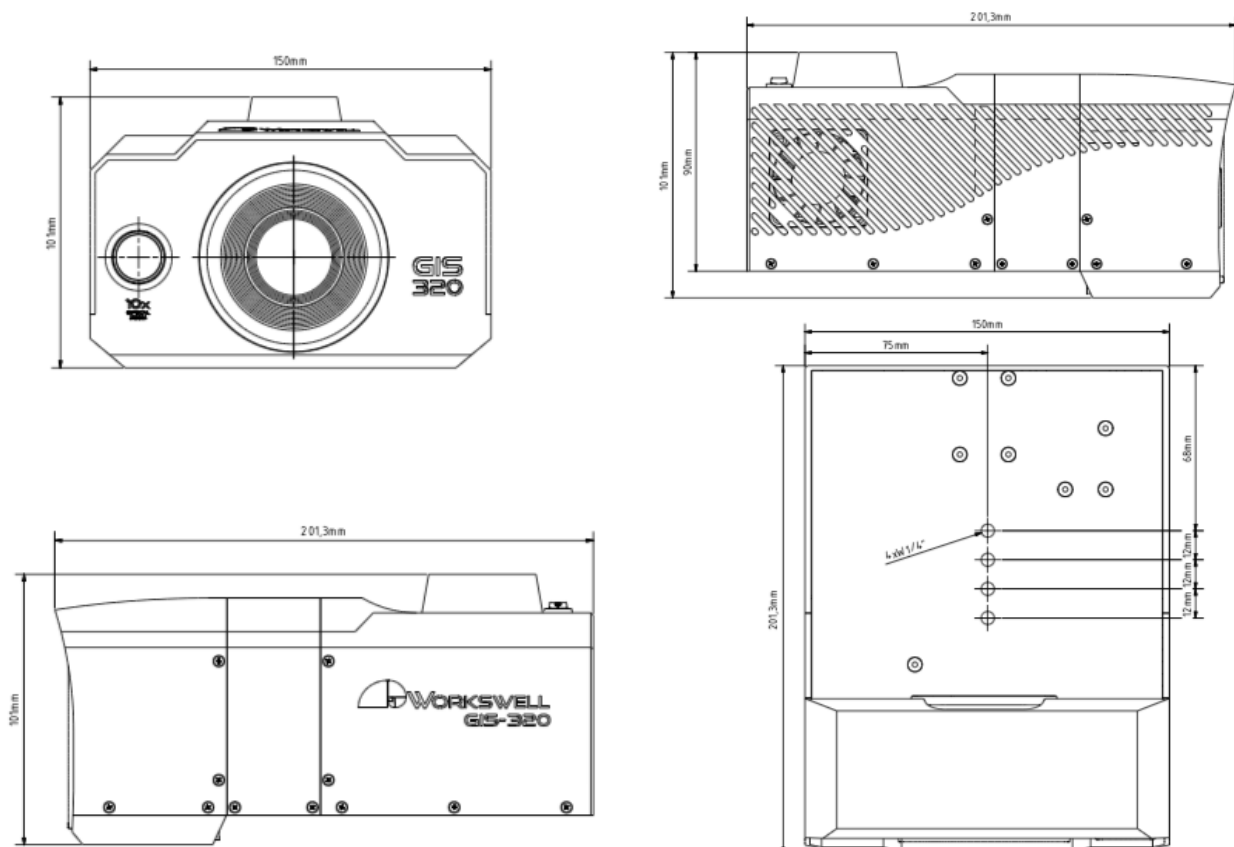

Workswell GIS-320



Contact information

WORKSWELL IN THE WORLD



Grafinta
Avda. Filipinas, 46
28003 Madrid
Tfo. 91 5537207
Fax 91 5336282
E-mail grafinta@grafinta.com

Find our partners worldwide

www.workswell.eu/where-to-buy

SALES DEPARTMENT

Website: www.workswell.eu
E-mail: sales@workswell.eu
Mobile: +420 737 547 622

COMPANY CONTACT

Website: www.workswell.eu
E-mail: info@workswell.eu
Mobile: +420 725 877 063

OFFICE LOCATIONS

Europe - Prague
United States of America
Global partner network

www.workswell.eu

