

VN-200 GNSS/INS

Miniature, high-performance GNSS-Aided INS

Highlights


0.2° Dynamic Heading Accuracy (INS)	5-7°/hr (typ.) Gyro In-Run Bias Stability	400 Hz Position, Velocity and Attitude Data	800 Hz IMU Data
0.03° Dynamic Pitch/Roll Accuracy (INS)	< 0.04 mg Accel In-Run Bias Stability	1.0 m / 1.5 m Horizontal / Vertical Position Accuracy	Surface Mount (SMD) 24 x 22 x 3 mm; 4 grams; 445 mW

Product Overview

The VN-200 is a miniature, high performance GNSS-Aided Inertial Navigation System (GNSS/INS) that combines 3-axis gyros, accelerometers and magnetometers, a high-sensitivity GNSS receiver, and advanced Kalman filtering algorithms to provide optimal estimates of position, velocity, and attitude.

The VN-200 is the world's first GNSS/INS in a single surface mount package (SMD). At the size of a postage stamp, the VN-200 SMD requires only a single 3.2-5.5V power supply and can be directly embedded into a user's electronics for unprecedented SWAP advantages.

The VN-200 Rugged is the "plug and play" version of the VN-200 SMD. Enclosed in a clamshell precision anodized aluminum enclosure, the VN-200 Rugged offers additional protection of the internal inertial sensors, GNSS receiver and electronics.

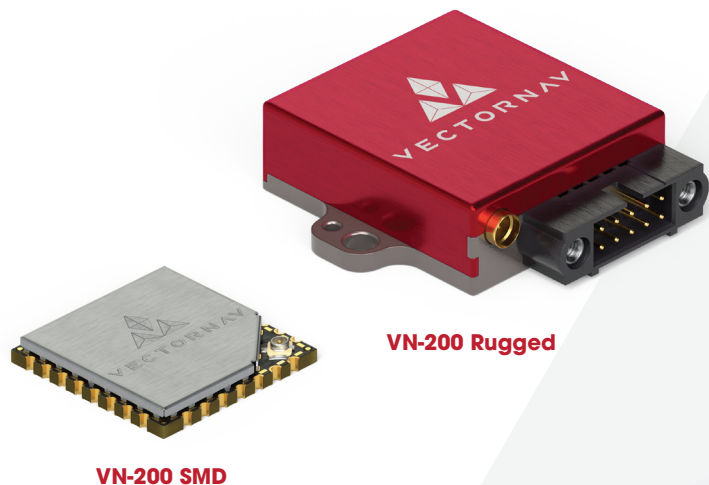

Features

Industry-Leading INS

The VN-200 features VectorNav's proprietary Extended Kalman Filter INS algorithm, which is proven to excel under the most challenging dynamic conditions.

72-Channel GNSS Receiver

Onboard GNSS receiver, supporting GPS, Galileo and SBAS corrections, providing the most compact, high-performance industrial-grade INS in the market.

True Inertial Navigation System

No mounting orientation restrictions or configuration modes; Automatic filter initialization and dynamic alignment.

Software Compatibility

The VN-200 Rugged and SMD share a common communication protocol with the entire VectorNav product line.

Ease of Availability

ITAR-free and Made in the USA; Ships in 1-2 days.

User Configurable Messages

ASCII and VectorNav Binary messages.

Grafinta
 Avda. Filipinas, 46
 28003 Madrid
 Tfo. 91 5537207
 Fax 91 5336282
 E-mail grafinta@grafinta.com

Each individual VN-200 sensor undergoes a robust calibration and acceptance testing process at VectorNav's AS9100 certified manufacturing facility. Performance specifications are based on comprehensive field testing and results from real-world applications, and are regularly tested to ensure continued conformance to such specifications.

Sensor Summary

- ▶ VectorNav proprietary Extended Kalman Filter INS delivers coupled position, velocity, and a continuous attitude solution over the complete 360° range of operation
- ▶ True INS Filter, no mounting restrictions, modes of operation or constraints required
- ▶ Real-time gyro and accel bias tracking and compensation
- ▶ VectorNav Processing Engine (VPE) for disturbance rejection, adaptive filtering, dynamic filter tuning
- ▶ Hard/Soft Iron Compensation (Real-time and Manual 2D & 3D)
- ▶ Individually calibrated for bias, scale factor, misalignment, and temperature over full operating range (-40°C to +85 °C)
- ▶ Raw Pseudorange, Doppler and Carrier Phase outputs
- ▶ Real-time and delayed heave estimation
- ▶ Coning and sculling integrals (ΔV 's, $\Delta \theta$'s)
- ▶ Data output format: ASCII (VectorNav), NMEA-0183, Binary (VectorNav)
- ▶ VectorNav Control Center GUI (available for free download at www.vectornav.com) provides a practical tool for easy sensor setup, configuration and data viewing/logging
- ▶ ITAR-Free

Performance Specifications

ATTITUDE

Range (Heading/Yaw, Roll)	$\pm 180^\circ$
Range (Pitch)	$\pm 90^\circ$
Heading (Magnetic) ¹	2.0° RMS
Heading (INS) ²	0.2°, 1 σ
Pitch/Roll (Static)	0.5° RMS
Pitch/Roll (INS) ²	0.03°, 1 σ
Heading Mounting Misalignment (Rugged) ³	0.15°, 1 σ
Pitch/Roll Mounting Misalignment ³	0.1°, 1 σ
Angular Resolution	0.001°

POSITION/VELOCITY

Horizontal Position Accuracy ⁴	1.0 m RMS
Vertical Position Accuracy ⁴	1.5 m RMS
Free Inertial Position Drift ⁵	3.0 cm/s ²
Velocity Accuracy	< 0.05 m/s
Heave Accuracy	5 % or 5 cm
Delayed Heave Accuracy	2 % or 2 cm

IMU Specifications

	ACCELEROMETER	GYROSCOPE	MAGNETOMETER	BAROMETER
Range	± 16 g	$\pm 2,000^\circ/s$	± 2.5 Gauss	10 to 1200 mbar
In-Run Bias Stability (Allan Variance)	< 0.04 mg	< 10°/hr (5-7°/hr typ.)	-	-
Noise Density	0.14 mg/ \sqrt{Hz}	0.0035 °/s / \sqrt{Hz}	140 μ Gauss/ \sqrt{Hz}	-
Bandwidth	260 Hz	256 Hz	200 Hz	200 Hz
Cross-Axis Sensitivity	$\pm 0.05^\circ$	< 0.05 °	$\pm 0.05^\circ$	-

GNSS Receiver

Receiver Type	72 Channel, L1C/A, L1OF, E1, B1I GNSS
Constellations ⁶	GPS, GLONASS, Galileo, BeiDou, QZSS, SBAS
Time-To-First-Fix (Cold)	29 s
Time-To-First-Fix (Hot)	1 s
Altitude Limit	50,000 m
Velocity Limit	500 m/s

Interfacing

Output Data Rate (IMU) ⁷	up to 800 Hz
Output Data Rate (Position, Velocity & Attitude)	up to 400 Hz
Interface (VN-200 Rugged)	RS-232, Serial TTL
Interface (VN-200 SMD)	Serial TTL, SPI
GNSS PPS	30 ns RMS, 60 ns 99%
Input	Sync-in
Output	Sync-out

Environmental

Operating Temperature	-40° to +85° C
Storage Temperature	-40° to +85° C
MTBF (Rugged)	> 150,000 hours
MTBF (SMD)	> 240,000 hours



Mechanical/Electrical

	SIZE	WEIGHT	INPUT VOLTAGE	CURRENT DRAW ⁸	POWER ⁸
Rugged	36 x 33 x 9.5 mm	16 g	3.3 to 17 V	80 mA @ 5 V	500 mW
SMD	24 x 22 x 3 mm	4 g	3.2 to 5.5 V	105 mA @ 3.3 V	445 mW

1. With proper magnetic declination, suitable magnetic environment and valid hard/soft iron calibration.
 2. With sufficient motion for dynamic alignment.
 3. Constant on a per part basis. Can be calibrated out during system integration using boresighting or other alignment processes.
 4. Dependant on SBAS, clear view of GNSS satellites, good multipath environment, compatible GNSS antenna, and measurement duration period.
 5. Typical rate of growth in error of position estimates after loss of GNSS signal, provided INS full alignment prior to loss.
 6. Only GPS, Galileo and SBAS constellations used in VN-200 default configuration.
 7. Contact VectorNav for higher IMU data output rates.
 8. Not including active antenna power consumption.