



LiGrip H300

Handheld Rotating Laser Scanner

LiGRIP H300

Handheld Rotating Laser Scanner



Key Features

300-Meter Scanning Range
640,000 pts/s

Boasting a cutting-edge XT32M laser, the LiGrip H300 achieves a maximum range of 300 meters, and the scanning rate can reach 640,000 pts/s.

Versatile Mapping Methods

Choose from **SLAM**, **RTK-SLAM**, and **PPK-SLAM** for flexibility across a range of scenarios.

RTK-SLAM: Ideal for areas with CORS signal coverage, allowing you to directly obtain precise point clouds with absolute coordinates.

PPK-SLAM: In areas without CORS signal coverage, you can choose to set up a base station or use GreenValley's LiCloud to obtain point clouds with absolute coordinates.

SLAM: Point clouds with absolute coordinates can be obtained through the integration of GCP control points (if point clouds without absolute coordinates are sufficient, direct data collection can be performed).

Multi-Platform Compatibility

Use the handheld, backpack, vehicle-mounted, and drone-mounted to ensure comprehensive coverage and enhanced efficiency for different scene requirements.



Abstract

The LiGrip H300 is the range-finding upgrade to the GreenValley's LiGrip handheld series. This sleek and compact device offers lightweight handling, user-friendly operation, and versatile installation options. With its advanced sensors, the LiGrip H300 can quickly capture extensive scene data across various platforms, such as handheld, backpack, mounted on vehicle, and drone. Experience the power of multiple high-precision mapping methods, including SLAM, PPK-SLAM, and RTK-SLAM, allowing you to swiftly acquire point cloud data with absolute coordinates. Combined with GreenValley's self-developed LiDAR 360 and LiDAR 360MLS software, the LiGrip H300 effortlessly tackles last-mile challenges in mapping, mining, forestry, and road asset survey.

Real-Time Processing

Scan and process simultaneously, with LAS results immediately available. With RTK, obtain point clouds with absolute coordinates.

1 Inch CMOS Camera Clearer Imaging

Featuring a detachable 1-inch CMOS panoramic camera, the INSTA ONE RS LEICA supports 6K resolution and excels in indoor and low-light environments. Equipped with a metal heat dissipation structure, the camera can quickly dissipate heat. The camera supports detachable components.




Lightweight and portable Weighing just 1.3 kg




Handheld Weight:
1.67kg



Handheld Only:
1.30kg



Handheld + Camera:
1.60kg




Handheld + Tripod:
1.37kg

Collection and Processing

Acquisition and Control

GreenValley APP offers comprehensive features such as device management, collection control, real-time point cloud display, project management, RTK settings, virtual base station, coordinate system settings, and data copying.

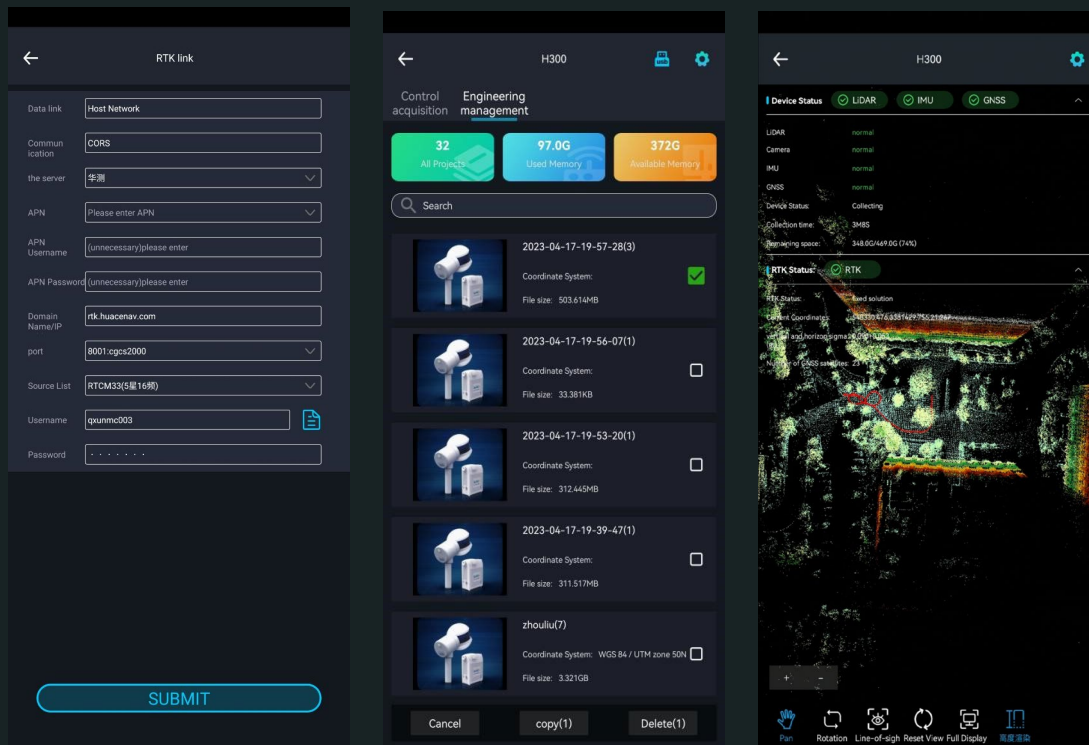

Mobile SLAM Measurement Data Fusion

Based on LiDAR360MLS, a mobile SLAM measurement data fusion and 3D elements intelligent extraction and analysis software developed by GreenValley. It supports PPK-SLAM, RTK-SLAM, SLAM processing, control point-based adjustments, point cloud accuracy improvement, seamless multi-project data stitching, point cloud and panoramic image generation, LAS/LAZ data export, orthophoto, and planimetric map export. Embedded with Insta360 Studio, the processing speed of indoor and outdoor operations can reach a ratio of 1:2 (with color correction). It supports camera calibration, data measurement (length, area, volume), and panoramic-based measurement.



Data Post-processing and Applications

Data can be processed and analyzed directly through LiDAR360MLS or easily imported into LiDAR360 for applications in mapping, road asset survey, mining, forestry, and beyond, effectively addressing your data application's last-mile challenges.



Specifications

System Parameters

| | | | |
|-----------------------|---|------------------------------|------------------|
| Size | L195mm×W125mm×H350mm | Voltage | 15.2V |
| Battery Pack Size | L134mm×W64.6mm×H167mm | Storage | 512GB |
| Handheld Weight | 1.67kg (Including Tripod and Camera) | Battery | 5870mAh |
| Protection rating | IP54 | Single Battery Life | 3h |
| Port | USB, Ethernet | Continuous Scanning Duration | Up to 55 minutes |
| Suitable Environments | Versatile for a wide range of indoor and outdoor applications | | |

LiDAR Sensor Parameters

| | | | |
|-------------------|---------------|------------|------------------|
| Scan Rate | 640,000 pts/s | Scan Range | Up to 300 meters |
| Scanning Accuracy | Up to 1cm | FOV | 280°×360° |

Camera Parameters

| | | | |
|-------------|--|------------------|-----------|
| Camera Type | Insta ONE RS 1-inch Panoramic Camera | Photo Resolution | 6528x3264 |
| Data Format | MP4 INSV | Video Resolution | 6144x3072 |
| Size | L95mm×W60mm×H55mm (including heat dissipation structure) | | |
| CMOS Size | 1 inch | | |

RTK Module ^[1]

| | | | |
|-----------------|--|----------------------|-------|
| GNSS System | GPS+BDS+Glonass+Galileo+QZSS, Supports 5 constellations and 16 frequencies | | |
| RTK Accuracy | 1cm+1ppm | RTK/PPK Protocol | NTRIP |
| Size | L97mm×W71mm×H30mm | Weight | 190g |
| RTK Data Format | .rtk | GNSS Raw Data Format | .log |
| Compatibility | LiGrip H300 and LiGrip H120 | | |

Mapping Method

| | | | |
|--------------------|--------------------------|----------------------|-----------|
| Mapping Principles | RTK-SLAM, PPK-SLAM, SLAM | Real-time Processing | Supported |
|--------------------|--------------------------|----------------------|-----------|

Data Outcomes

| | | | |
|-------------------------|-------------|---------------------|---------------------|
| Relative Accuracy | Up to 1cm | Absolutely Accuracy | ≤5cm ^[2] |
| Point Cloud Data Format | Las, LiData | | |

[1] indicates that it needs to be purchased separately

[2]The greater the number of feature points in the scanned scene, the better the feature quality, and the higher the point cloud accuracy. It is recommended to follow the recommended operating methods to obtain high-precision point cloud results.

Backpack Kit

The GreenValley's backpack kit is a versatile accessory designed for handheld 3D LiDAR SLAM systems. Featuring an ergonomic design for comfortable wear, it is lightweight and easy to assemble and disassemble. With an integrated GNSS antenna, it supports PPK and RTK (requires separate purchase of RTK module for H300 and H120) and directly outputs point cloud data with absolute positioning. This saves time and improves your operational efficiency. The integrated backpack frees up your hands, making work more comfortable and efficient. It is suitable for applications in surveying, forestry, stockpiles, powerline scanning, mining, and more.



Product Advantages

Light And Small

Minimalist shape, greatly reducing the size and weight of the equipment

Easy To Disassemble

Minimalist design, easy disassembly and assembly, easy to use, assembly time is less than 1 minute

Weather-Resistant Design

With an IP54 protection rating, the LiGrip is rugged and resistant to rain and dust

High Efficiency

Hands-free, collect as you go

High Precision

Combine GNSS and LiDAR SLAM algorithms to obtain point cloud data with absolute coordinate positions

High Compatibility

Compatible with a variety of GreenValley International products, supporting one-stop software solutions

System parameters

| | |
|---------------------------------|--|
| Size | 760*500*270mm (Collapsed) 1100*500*270mm (Extended) |
| Material | Aluminum alloy + carbon fiber |
| Weight | 3.2kg |
| Compatible with handheld models | H300、H120、V100 |
| Absolute accuracy | ≤5cm |

* In areas without GPS or poor signal, it is recommended to use handheld mode

Vehicle-Mounted Kit

It supports PPK and RTK (separate purchase of RTK module required), providing a direct output of point cloud data with absolute positioning. Suitable for large-scale, strip-shaped terrain and facade data collection, saving time and effort.



System Parameters

| | |
|-------------------------|---------------------------|
| Supported Vehicle Types | Sedan, SUV |
| Kit Weight | 3.6kg |
| Kit Dimensions | L340mmxW305mmxH360mm |
| Mounting Method | Suction Cup + Safety Rope |
| Maximum Vehicle Speed | 40KM/H |

Drone-Mounted Kit

It supports PPK and RTK (separate purchase of RTK module required), providing a direct output of point cloud data with absolute positioning. Suitable for large-scale topographic mapping, facade measurement, stockpile measurement, and 3D modeling.




System Parameters

| | |
|---|---------------------|
| Supported Drone Models | M300 |
| Kit Weight (including bracket, power cord, GNSS antenna, RTK module) | 330g |
| Takeoff weight (including handheld, control box) | 2.45kg |
| Power Supply Mode | Powered by Drone |
| Kit Dimensions | L388mmxW70mmxH140mm |
| Working Durance | 25 minutes |

Industry-Specific Solutions


Topographic Mapping

Use RTK-SLAM with CORS to obtain point cloud data with absolute coordinates. In areas without CORS coverage, PPK-SLAM technology can achieve the same accuracy, meeting 1:500 topographic map requirements. Paired with a high-resolution panoramic camera, it provides auxiliary object attribute judgment. Using drone/vehicle-mounted kits, large-scale topographic mapping data can be collected in one go.

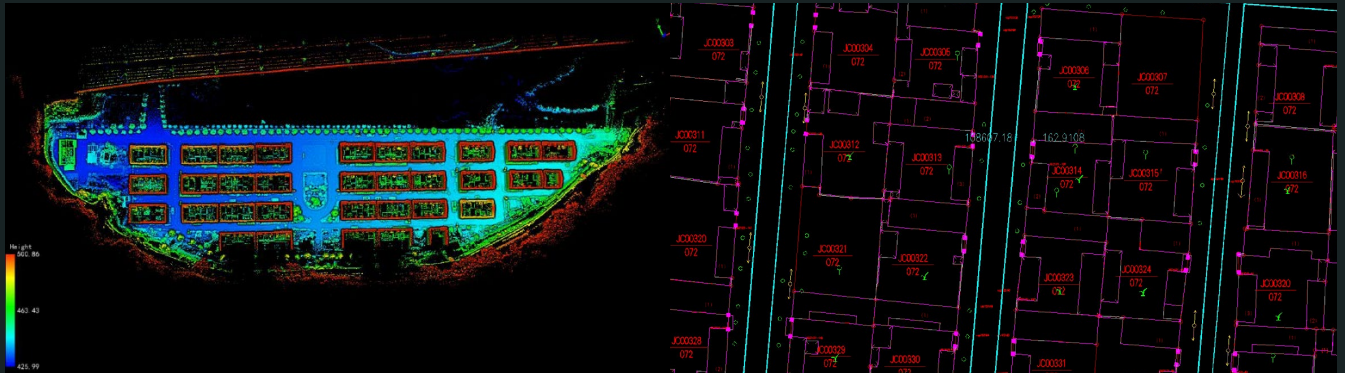


Facade Measurement

With a 300m range and 640,000 pts/s, the H300 can measure taller buildings and capture finer object details, making facade drawing easier. For scenarios requiring facade scanning due to tall buildings, tree obstructions, or large areas, drone/vehicle-mounted kits can be used for easy data acquisition. Use the LiDAR 360MLS facade module to quickly and efficiently create facade data based on point clouds or panoramas.

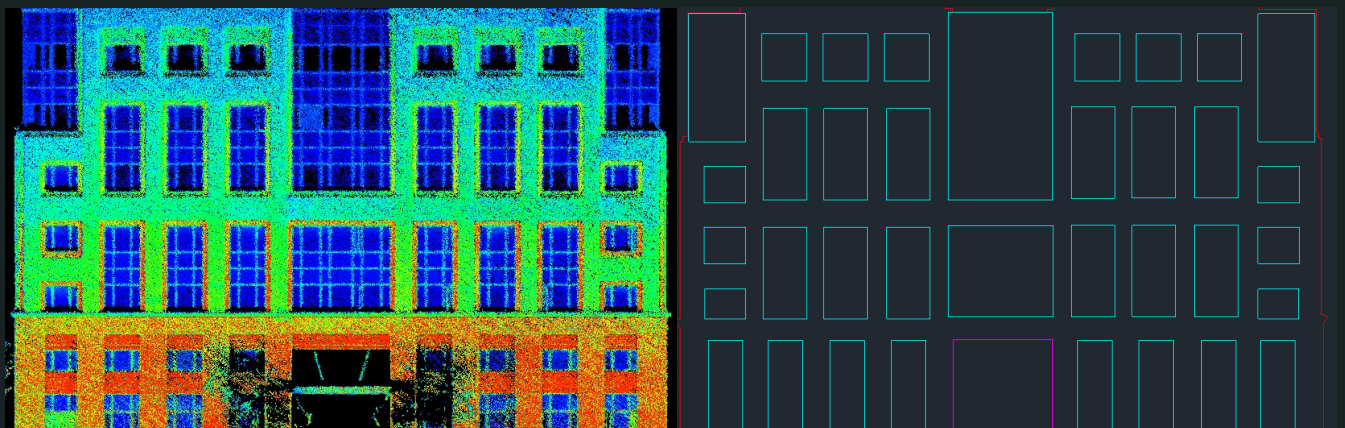


Volume Measurement

Whether indoors, outdoors, or in mines, the H300 can easily and accurately obtain point cloud data for volumes, with an accuracy of up to 1%.

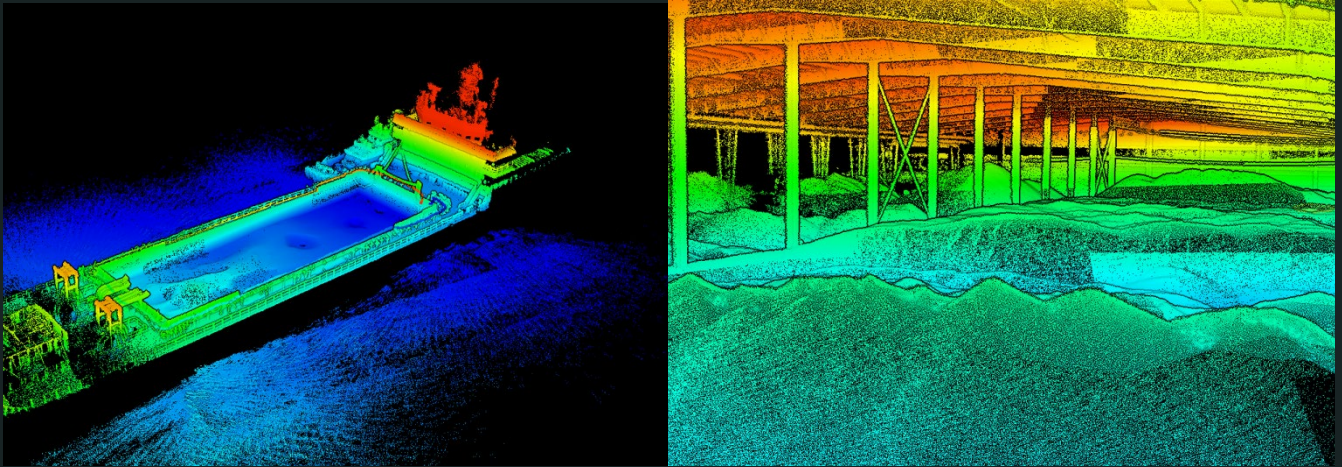


Mining

Suitable for open-pit mine stockpile volume, mine area topographic mapping, underground mining area plan, cross-section, volume measurement, and slope line extraction.

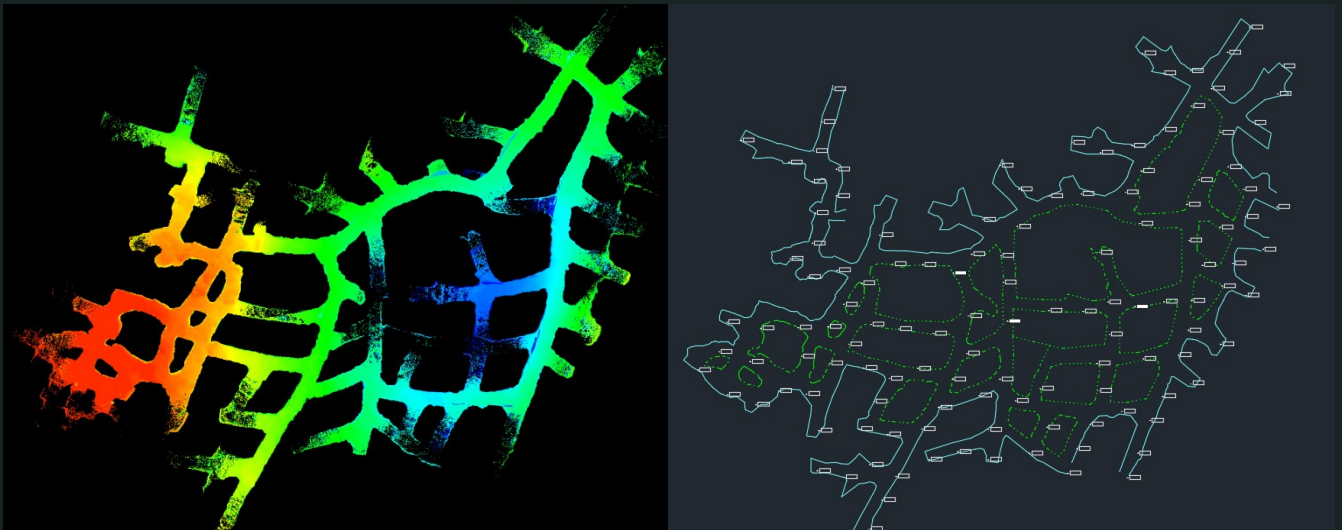


Property Surveying

The H300 handheld SLAM scanner's convenience and accuracy make it widely applicable for property surveying, asset inspection, and engineering auditing, with measurement efficiency 10 times that of traditional manual methods.

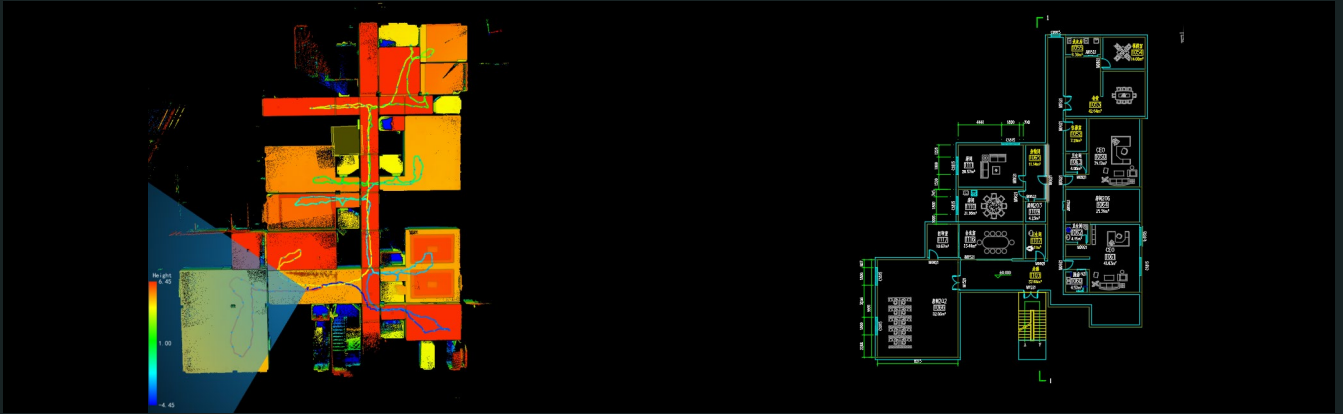


3D Modeling / Digital Archiving

Handheld measurements for interior structures and exteriors, along with aerial measurements for rooftops and high-rise building sections, provide a comprehensive point cloud for both the inside and outside of objects. This data serves as a foundation for the preservation of historic architecture, reverse modeling and digital conservation.

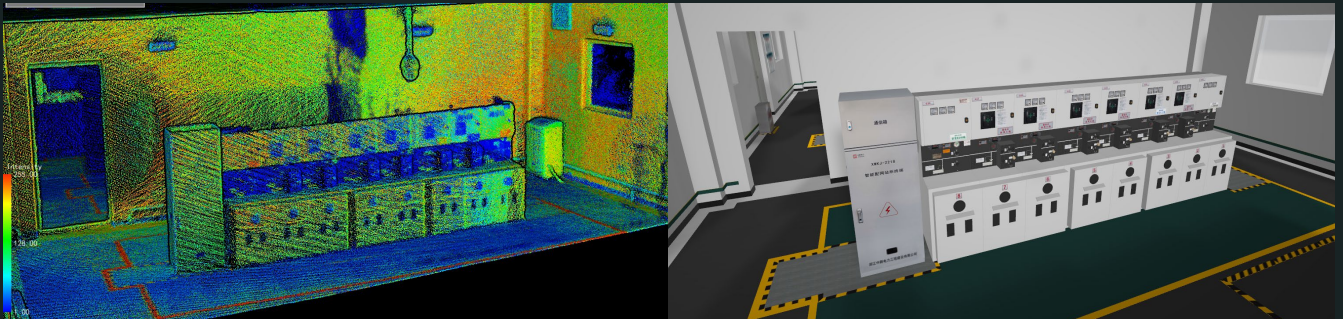


Power Grid and Substation Scanning

The H300 offers a range of up to 300 meters, effortlessly collecting point clouds of powerlines and the tops of electrical towers. Its excellent point density ensures more detailed scanning of substations, providing a better base map for modeling and navigation.

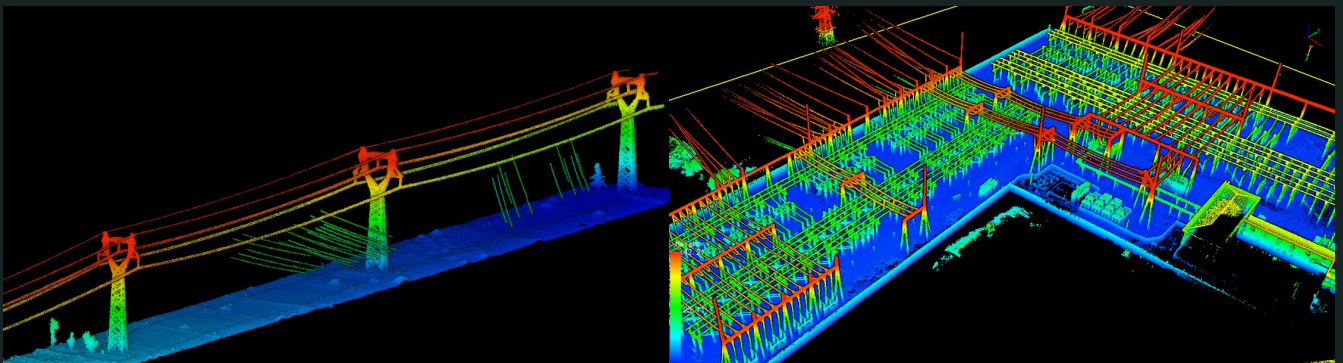


Underground Spaces

Our solution is applicable to the measurement of enclosed areas such as underground parking lots, electrical corridors, air-raid shelters, and shopping malls. It's suitable for underground space surveying, scanning, and providing navigation maps for precision inspection robots.

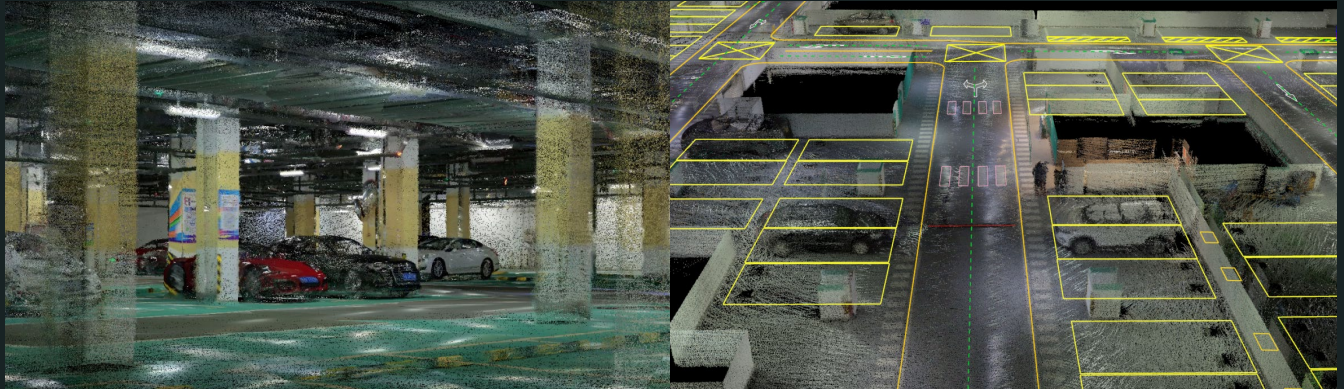

Forestry

Handheld scanning of forest stands and large forested areas is possible with GreenValley's LiDAR 360 Forestry Module. Quickly gather statistics on the number of trees in forest stands or vast forested areas, individual tree locations, tree height, crown width, DBH, and tree species (when combined with panoramic imagery).

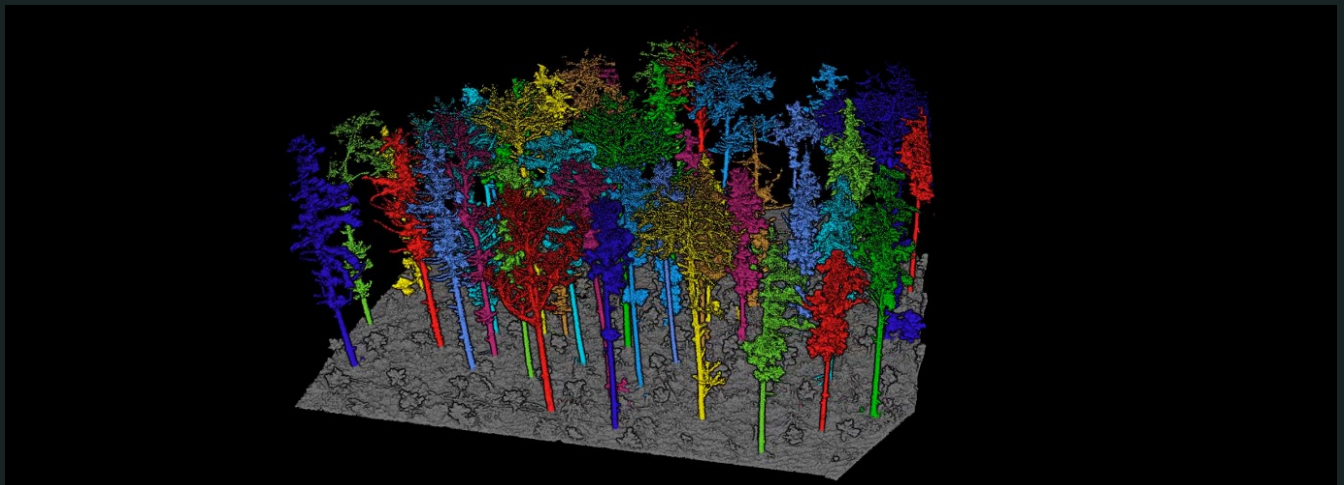

| | |
|------------------------|------------|
| Tree Height (m) | 9.1 |
| DBH (cm) | 14.3 |
| Crown Diameter (m) | 5.2 |
| Crown Diameter E-W (m) | 4.5 |
| Crown Diameter N-S (m) | 4.8 |
| Crown Area (sqm) | 18.3 |
| Crown Volume (cu.m) | 53.2 |
| CBH (m) | 4.895 |
| Trunk Volume (m) | 1.536 |
| Tree Species | Balsam fir |
| Slope | 15° |
| Slope Direction | 221° |



Tree ID: 178

Location: ****09.8920, ****420.2790, ***.062

Map The World In 3D
www.greenvalleyintl.com



E-mail: info@greenvalleyintl.com
Address: 729 Heinz Avenue, Suite 9,
Berkeley, CA 94710, USA



grafinta
Avda. Filipinas, 46
28003 Madrid
Tfo. 91 5537207
E-mail grafinta@grafinta.com